


W7. 44m x L9. 94m x H4. 13m

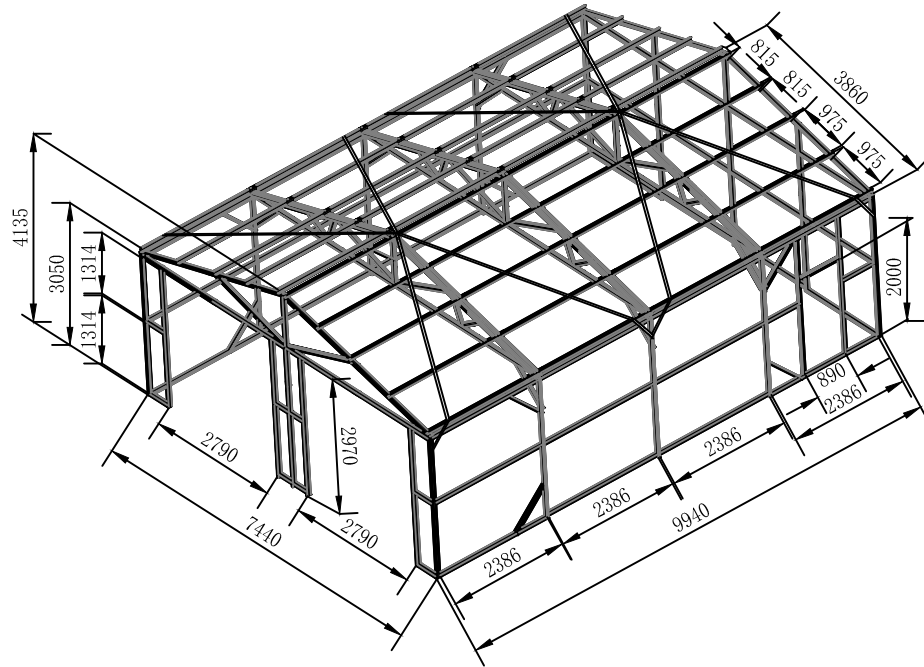


Technical Requirement

- 1.The main frames and supports are processed by hot galvanized coating (thickness: 0.8mm)
The complex structure is use for vertical supports;
- 2.The sheets are made of thickness 0.32mm coated galvanized steel;
- 3.The main steel frame are connected with high strength screws (ST 4.8*16mm);
- 4.The bottom part is fixed with high strength bolts(M8*80mm).
- 5.It is recommended to install it on the cement floor. The size of the cement foundation is not less than 7560 x10060.

Unit:mm

Frame Sketch

CG2533-H305

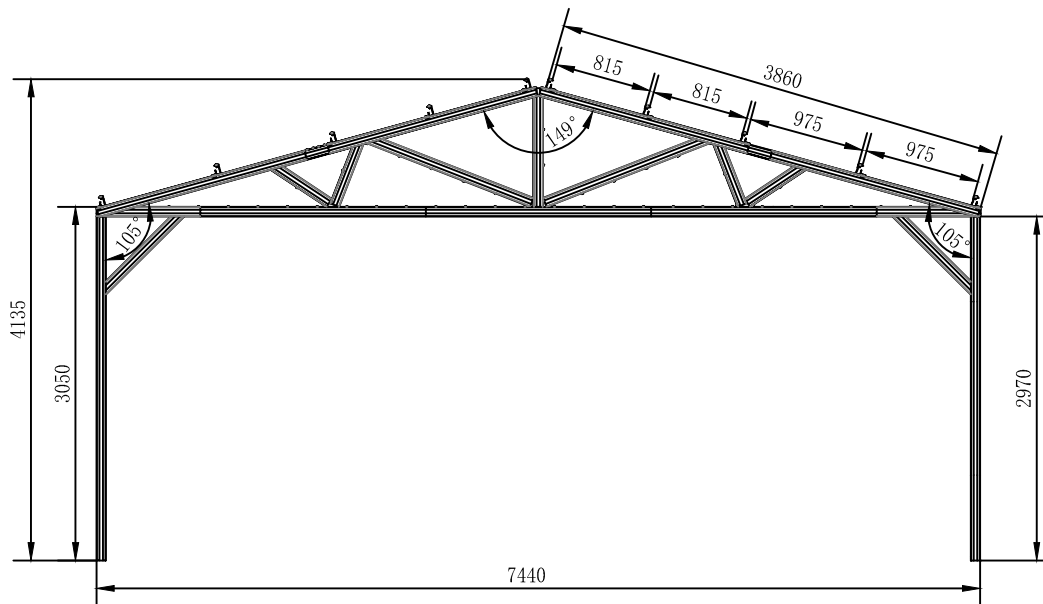

Unit:mm

Frame Sketch

CG2533-H305

Technical Requirement

- 1.The main frames and supports are processed by hot galvanized coating (thickness: 0.8mm)
The complex structure is use for vertical supports;
- 2.The sheets are made of thickness 0.32mm coated galvanized steel;
- 3.The main steel frame are connected with high strength screws (ST 4.8*16mm);
- 4.The bottom part is fixed with high strength bolts(M8*80mm).
- 5.It is recommended to install it on the cement floor. The size of the cement foundation is not less than 7560 x10060.