W7.44mxL12.43mxH4.13m

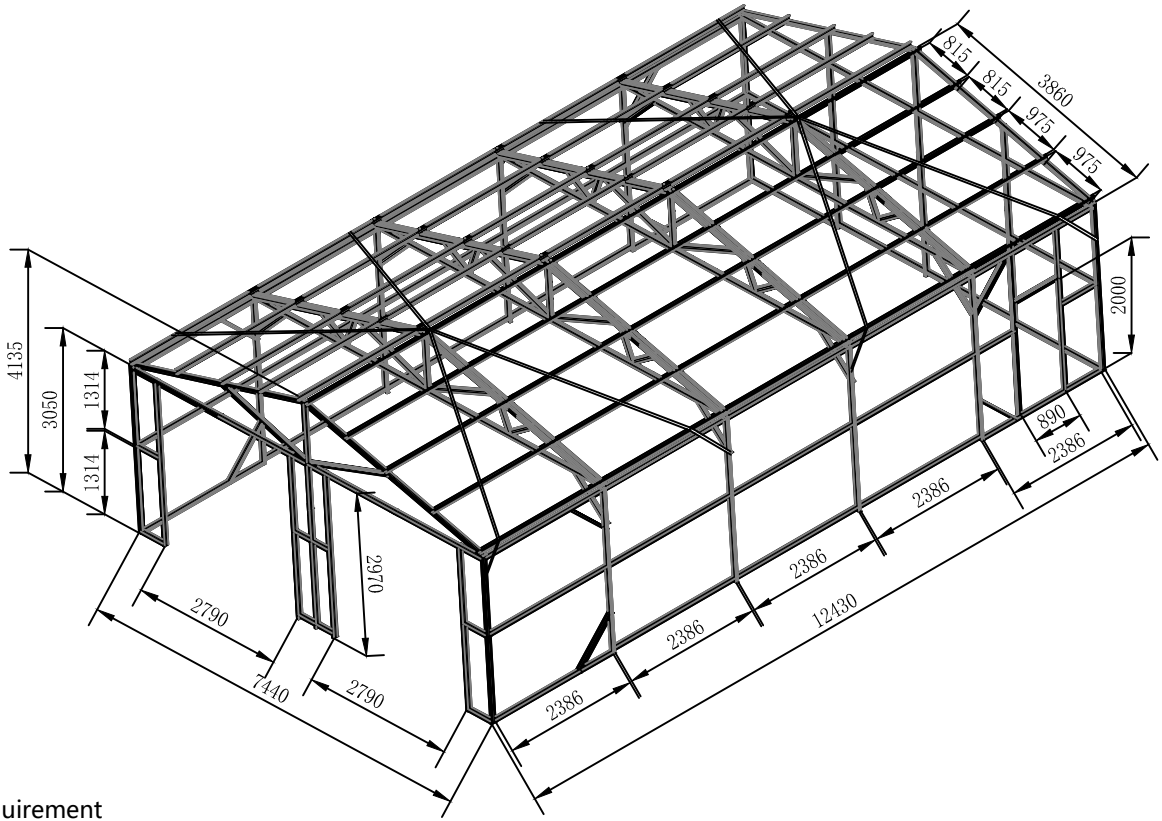

Technical Requirement

1.The main frames and supports are processed by hot galvanized coating (thickness: 0.8mm)
The complex structure is use for vertical supports;
2.The sheets are made of thickness 0.32mm coated galvanized steel;
3.The main steel frame are connected with high strength screws (ST 4.8*16mm);
4.The bottom part is fixed with high strength bolts(M8*80mm).
6.It is recommended to install it on the cement floor. The size of the cement foundation is not less than 7560 x12550.

Unit:mm

Frame Sketch

CG2541-H305

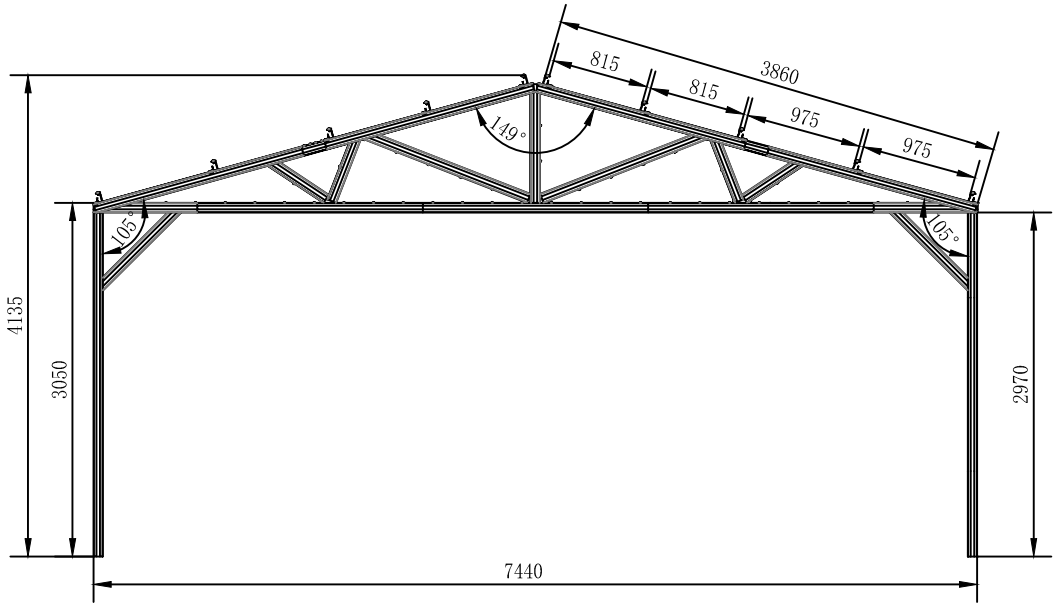

Technical Requirement

1.The main frames and supports are processed by hot galvanized coating (thickness: 0.8mm)
The complex structure is use for vertical supports;
2.The sheets are made of thickness 0.32mm coated galvanized steel;
3.The main steel frame are connected with high strength screws (ST 4.8*16mm);
4.The bottom part is fixed with high strength bolts(M8*80mm).
6.It is recommended to install it on the cement floor. The size of the cement foundation is not less than 7560 ×12550.

Unit:mm

Frame Sketch

CG2541-H305