



CONTAINER SHELTER

Front & Back Wall


ASSEMBLY MANUAL

Model: EMC-C2020/C2040


Size: W6m×L6m×H2m/ W6m×L12m×H2m




Part	Description	Quantity
1	Lower sidewall tube for back panel	5
2	Middle sidewall of middle back panel	3
3	Upper sidewall of middle back panel	1
4	Upper sidewall of side back panel	2
5	Upper sidewall of outermost back panel	2
6	Middle rail of back panel	6
7	Upper side rail of back panel	2
8	Middle base flange of back panel	3
9	Outermost base flange of back panel	2
10	Tensioning tube for back panel	2+1
11	Tube clip	7
11A	Steel peg for back panel	10
12	Hexagon bolt M10×75	34
13	Hexagon bolt M10×85	20
14	Hexagon bolt M10×30	10
15	Plastic cap	2
16	Back cover	1
17	Rope for back panel	6
18	Upper door track	2
19	Lower door track	2
	Connectors for door track	2sets+4
20	Upper sidewall of side front panel	2
21	Lower sidewall of side front panel	2
22	Door beam	1+1
22A	Door rail	1
23	Upper side rail for front panle	2
24	Lower side rail for front panle	2
25	Bottom rail for winch of mechanical door(beside the door)	1
26	Base flange for front door	2
26A	Outermost base flange for front and back panel	2
27	Cover tensioning tube of front cover	2
28	Door dropping tube	6+6
28A	Door dropping tube at the bottom	1+1
29	Tube clip	6
30	Steel peg for front panel	8
31	Components for mechanical door	1sets
32	Hexagon bolt M10×75	40
33	Hexagon bolt M10×85	14
34	Hexagon bolt M10×30	10
35	Plastic cap for front panel	4
36	Front cover	1
37	Rope for front panel	6

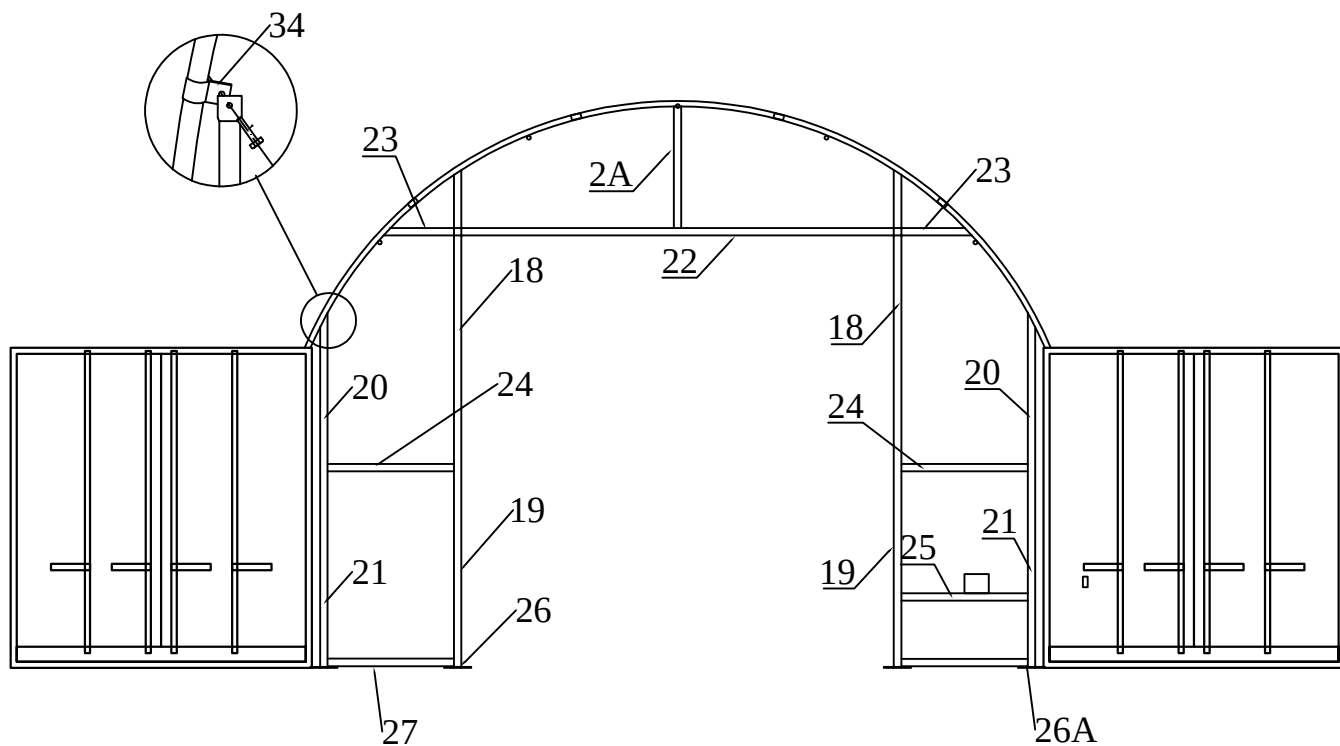


Front Panel Arch


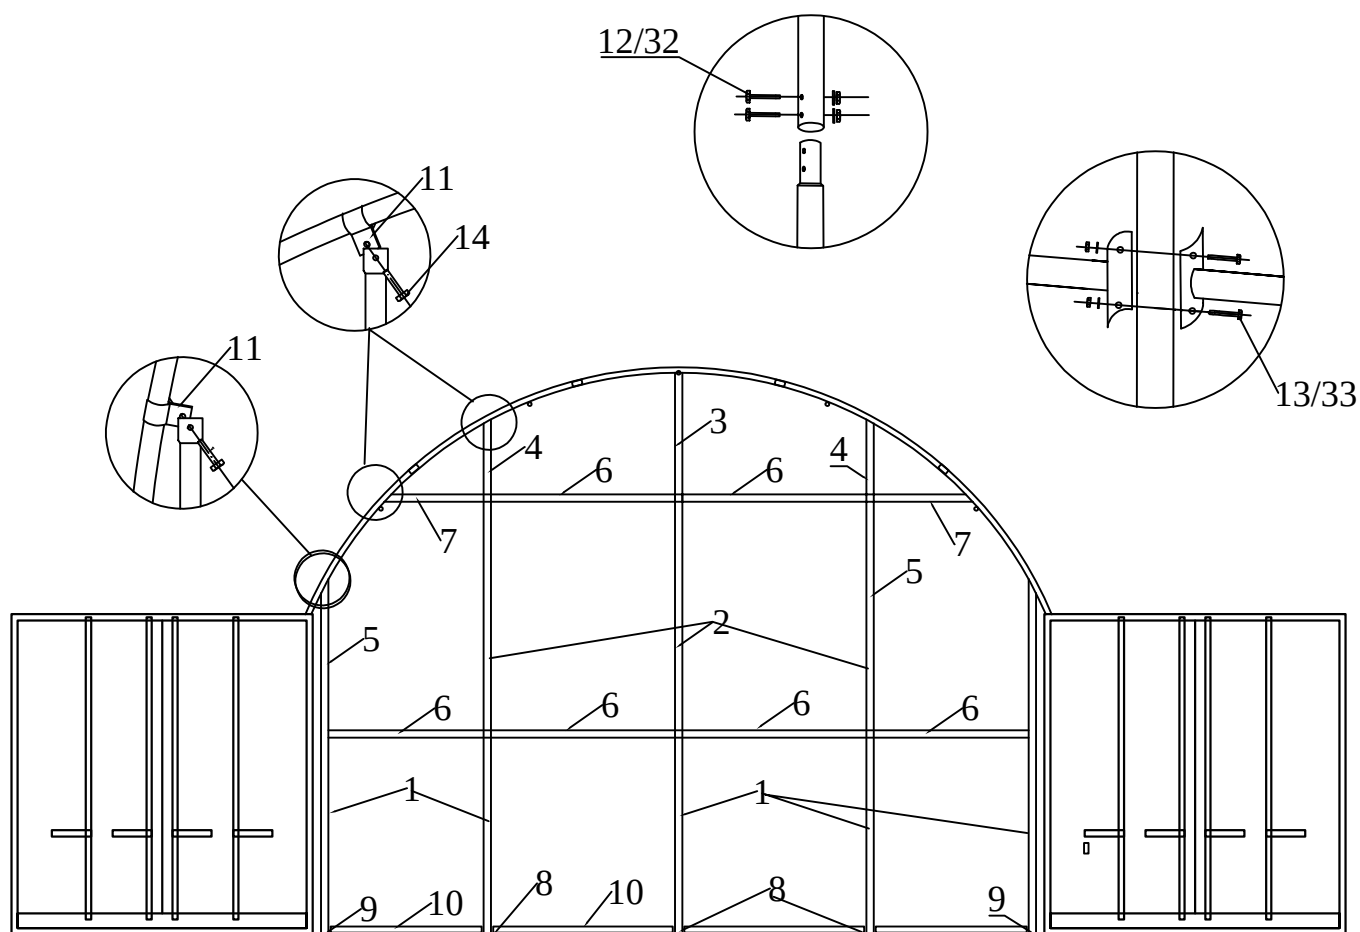


Back Panel Arch




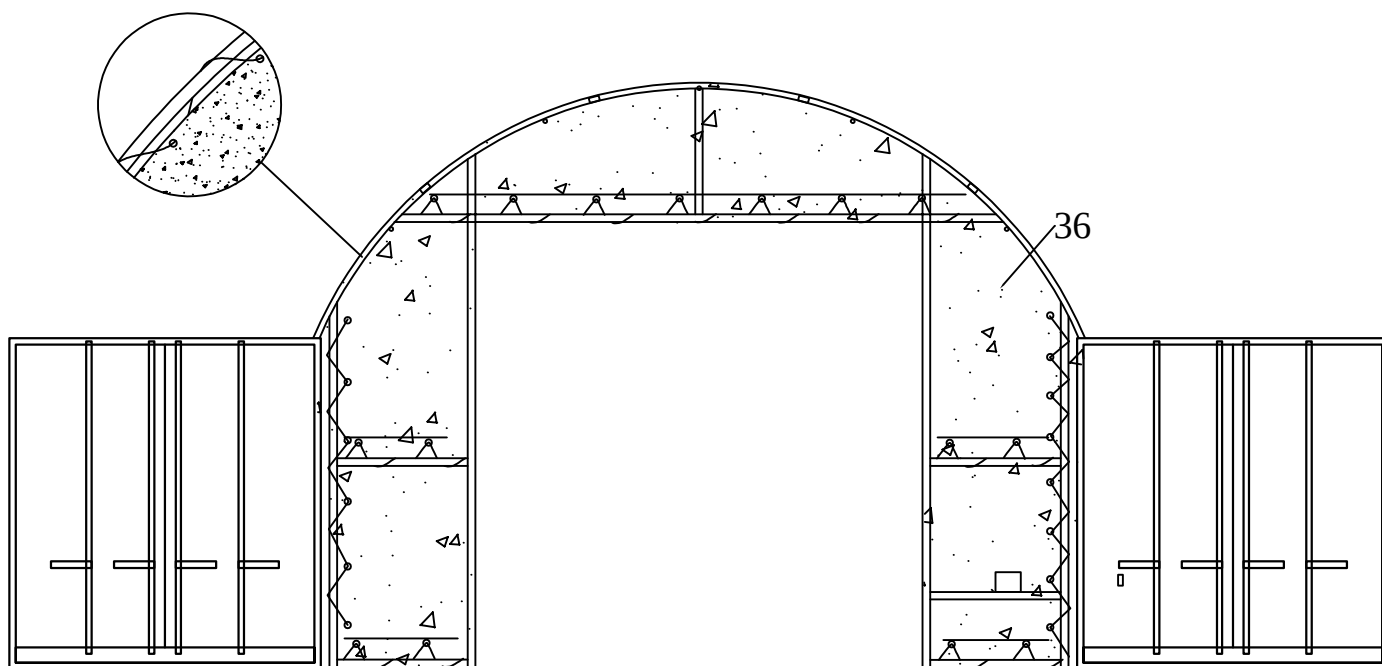

Installation of Front Panel Cover

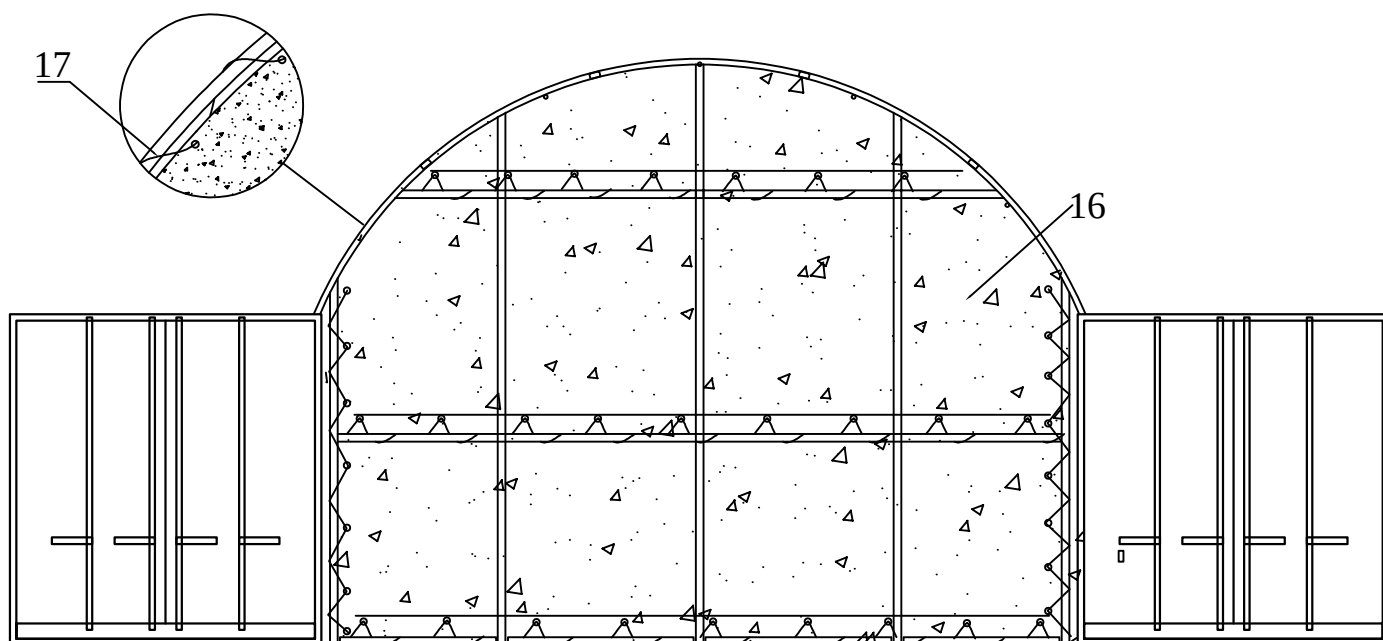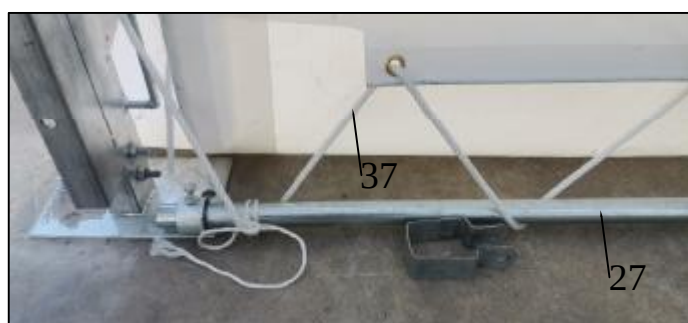

Installation of Back Panel Cover

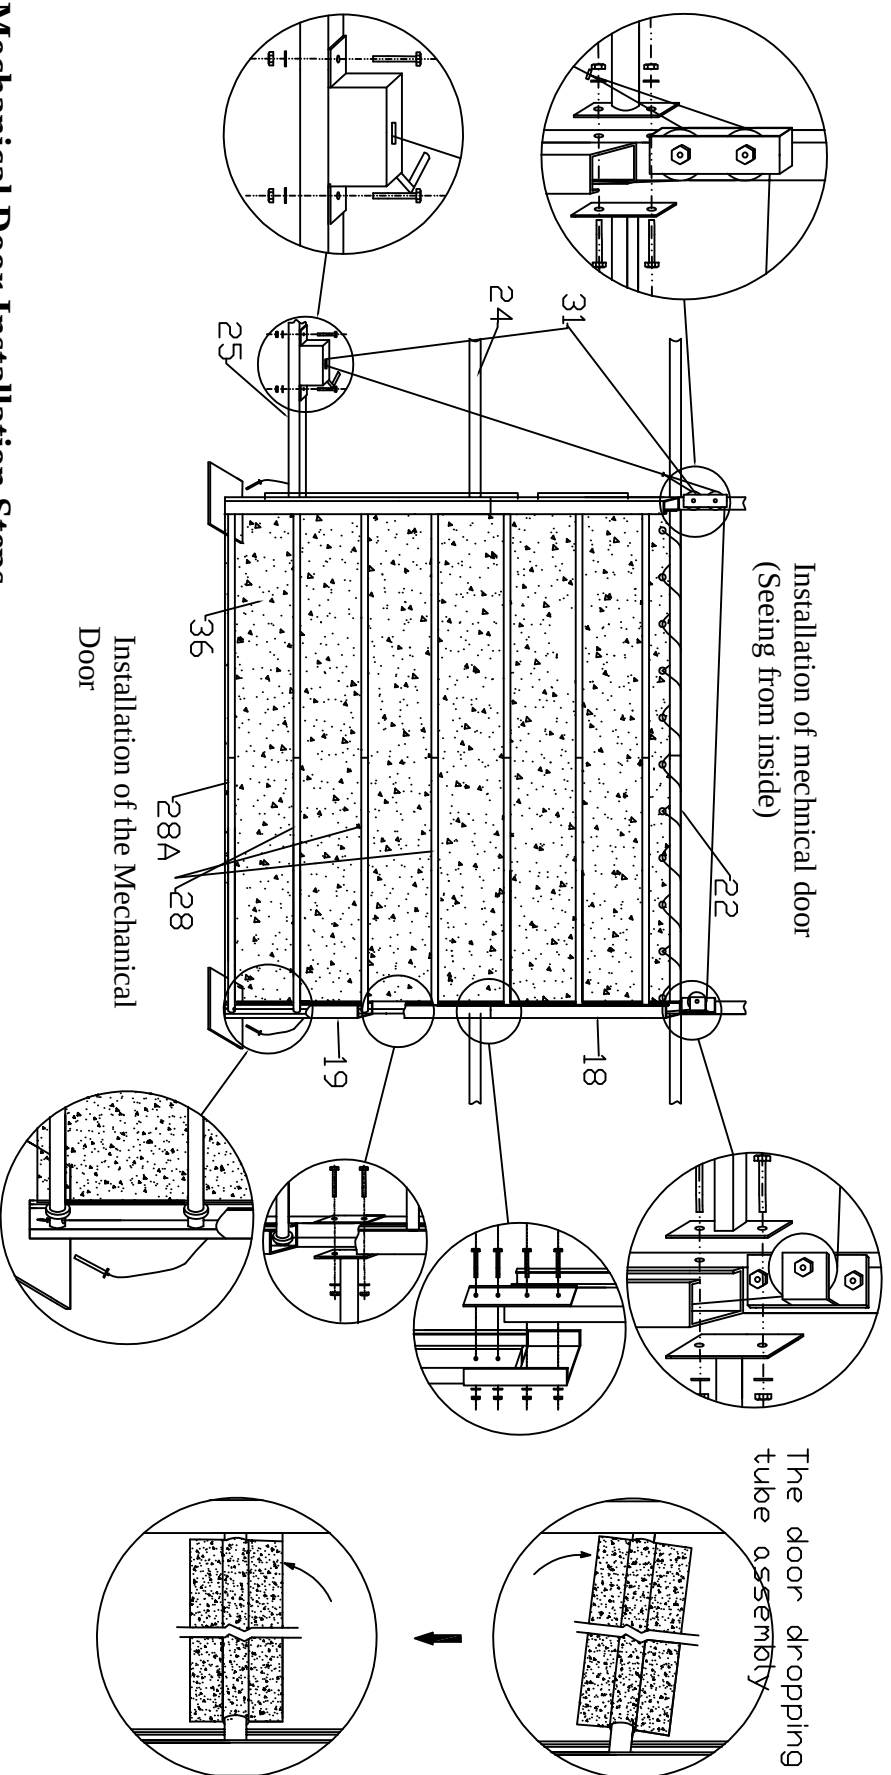

--Mechanical Door Installation Steps

1. Install Main Door Pulleys (left and right) over the Top of the Door on each side of the Door Beam (Part #22).
2. Next mount the Winch Mechanism to the Front Panel Lower Beam (Part #25).
3. Slide Bottom Door Dropping Tube (Part #28A) into the bottom horizontal fabric pocket on the Door Cover (Part #36). Then slide the six remaining Door Dropping Tubes (Part #28) into the remaining horizontal fabric pockets in the Door Cover.
4. From the bottom of the door tracks (18,19), gently raise and slide one door dropping tube (28) into the tracks. And then feed the other remaining door dropping tubes (28,28A) into the door tracks.
5. Next install the steel wire that leads from the bottom of the door winching assembly to the bottom of the door dropping tubes. The Winch Assembly has a long and a short steel cable secured to it. Feed the end of the shorter of the two cables through the lower roller of the double pulley at the top of the door assembly track closest to the Winch Assembly, and then down through the holes in the Bottom Door Dropping Tube (28A) on the left hand side of the door (facing from the inside). When the steel cable goes down through the hole in the Bottom Dropping Tube (28A), tie a knot in the steel wire so that it cannot pass back up through the hole.
6. From the Winch Assembly route leading end of the Longer Steel Cable through the Upper Roller of the double pulley on near door track and then through the Single Roller on the door track farthest from the Winch Assembly. Then down through the Bottom Door Dropping Tube (28A). When the steel cable goes down through the hole in the Bottom Door Dropping Tube (28A), tie a knot in the steel cable. Door can now be opened or closed by operating the Winch Assembly. Raise and lower the door several times to be certain door tube ends are not binding on track. Lubricate if necessary.